


Width (W)	Height (H)	Depth (D)	Weight
39.37 in	22.83 in	8.85 in	107 lbs

Cooling Capacity	Heating Capacity	Aux Heater	Air Flow (CFM)
12,030 BTU/h	11,970 BTU/h	6824 BTU/H 2kW Electric	330
Voltage	Noise Level	Refrigerant	Fuse Rating
208–230V / 60Hz	42–48 dB(A)	R32 / 22.9 oz (GWP 675)	Min 15A Max 20A

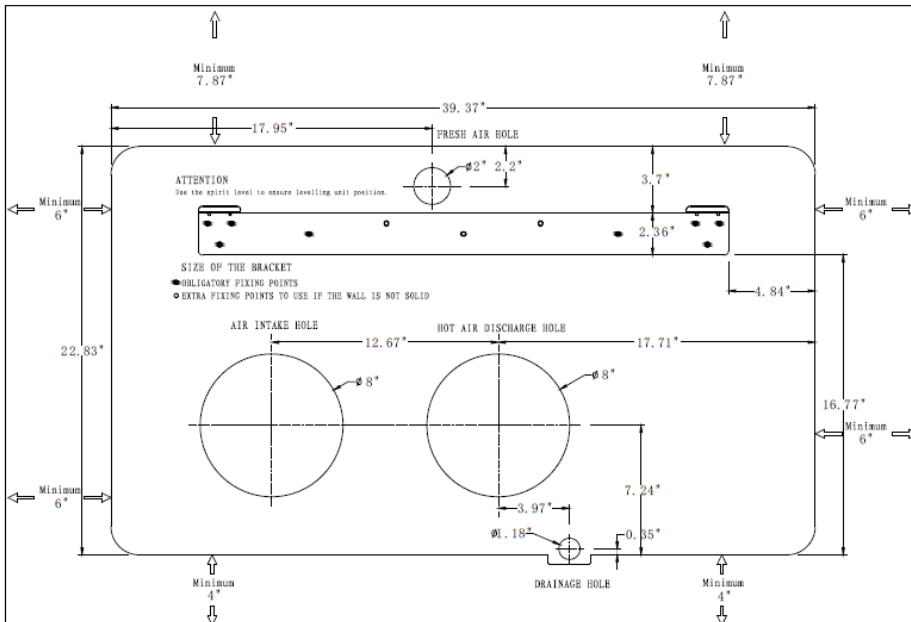

**Notes:**

- Wall-mounted, compact design with no outdoor unit required.
- Wi-Fi and remote control enabled.
- UL STD.60335-1 / 60335-2-40 and CSA C22.2 certified.
- Eco-friendly R32 refrigerant with low GWP.
- Optional 24V connection for remote thermostat

Heating 8 C	Heating -8 C	Heating -15 C	Heating 35 C
Indoor: 21.1 C, W.B.15.6 C Outdoor: 8.3 C, W.B.6.1 C	Indoor: 21.1 C, W.B.15.6 C Outdoor: -8.3 C, W.B.-11.6 C	Indoor: 21.1 C, W.B.15. C Outdoor: -15 C, W.B.-15 C	Indoor: 26.7 C, W.B.19.4 C Outdoor: 35 C, W.B.23.9 C
Range Btu/h:5600-11970	Range Btu/h:7000	Range Btu/h:4370	Range Btu/h:6500-12030
Nominal:11970Btu/h+2000W*	Nominal:7000Btu/h+2000W*	Nominal:4370Btu/h+2000W*	Nominal:12030Btu/h
Power Input:947W+2000W*	Power Input:890W+2000W*	Power Input:780W+2000W*	Power Input:1209W
*When electric heater in on.			